

SS-2U70EL SS-2U60EL SS-2U50ES SS-2U40ES

Industrial 700/600/500/400W ATX 2U Auto Ranging Power Supply



High Efficiency
86%



Introduction

Industrial ATX 2U Auto Ranging Power Supply suitable for Desktop & Rack Mount Chassis solutions. The Input power is Auto ranging from 100~240 VAC providing up to 400~700W of power to DC solutions.

Specification

Efficiency	The minimum efficiency shall be 86% with full load and 115Vac/60Hz.
Hold-Up Time	The output voltages stay in regulation at least 18ms with 70% load after loss of AC input
PROTECTIONS	Over Current Protection Over Voltage Protection Short Circuit Protection Over Temperature Protection
MTBF (Electronics)	100,000 hours at full load and 25°C ambient temperature
MTBF (Fan)	40,000 hours at 40°C
EMI	FCC part 15, Subpart B, Class B EN55022 CISPR22 Class B
Remote ON/OFF Control	When PS-ON is pull to TTL low, the DC output is to be enabled. When PS-OFF is pull to TTL high the DC output is to be disabled
RoHS	Compliant
COOLING	One 60mm DC FANS

Outputs (400W)

Voltage	+5V	+12V	-12V	+3.3V	+5VSB
Output Current(Max)	25A	32A	0.8A	25A	3.5A
Output Current(Min.)	0.5A	2A	0A	0.5A	0.1A
Ripple/Noise Max.(P-P):	60mv	120mv	120mv	60mV	60mV
Line Regulation:	±1 %	±1 %	±1 %	±1 %	±1 %
Load Regulation:	±5 %	±5 %	±5 %	±5 %	±5 %

Outputs (500W)

Voltage	+5V	+12V	-12V	+3.3V	+5VSB
Output Current(Max)	25A	40A	0.8A	25A	3.5A
Output Current(Min.)	0.5A	2A	0A	0.5A	0.1A
Ripple/Noise Max.(P-P):	60mv	120mv	120mv	60mV	60mV
Line Regulation:	±1 %	±1 %	±1 %	±1 %	±1 %
Load Regulation:	±5 %	±5 %	±5 %	±5 %	±5 %

Outputs (600W)

Voltage	+5V	+12V	-12V	+3.3V	+5VSB
Output Current(Max)	25A	48A	0.8A	25A	3.5A
Output Current(Min.)	0.5A	2A	0A	0.5A	0.1A
Ripple/Noise Max.(P-P):	60mv	120mv	120mv	60mV	60mV
Line Regulation:	±1 %	±1 %	±1 %	±1 %	±1 %
Load Regulation:	±5 %	±5 %	±5 %	±5 %	±5 %

Outputs (700W)

Voltage	+5V	+12V	-12V	+3.3V	+5VSB
Output Current(Max)	25A	56A	0.8A	25A	3.5A
Output Current(Min.)	0.5A	2A	0A	0.5A	0.1A
Ripple/Noise Max.(P-P):	60mv	120mv	120mv	60mV	60mV
Line Regulation:	±1 %	±1 %	±1 %	±1 %	±1 %
Load Regulation:	±5 %	±5 %	±5 %	±5 %	±5 %

FEATURES

- Maximum Power Output: 700/600/500/400W
- Voltage: 100 - 240VAC Full Range
- Frequency: 50 - 60Hz.
- Input current: 8A/10A (RMS) for 115VAC / 4A/5A (RMS) for 230VAC. (400W/500W,600W,700W)
- Inrush current: 35A for 115VAC, 55A for 230VAC (400W)
- Inrush current: 40A for 115VAC, 60A for 230VAC (500,600,700W)
- Safety Approval: Meet CE Rohs 2.0 2011/65/EU, Meet REACH
- Operation Temp.: 0°C~50°C
- High Efficiency: 86%
- Reliability MTBF : Using MIL - HDBK -217F the calculated MTBF > 100,000 hours at 25°C.


Mechanical & Environment

Operating Temperature	0°~45°C
Storage Temperature	-20°~70°C
Relative Humidity	5~90%, non-condensing 20% to 90%, non-condensing
Altitude	Altitude during operation: Up to 5000m
Reliability MTBF	Using MIL - HDBK -217F the calculated MTBF > 100,000 hours at 25°C.
Cooling	By ball bearing DC fan.
Dimensions	200x100x70(mm) (400W, 500W) 225x100x70(mm) (600,700W)
Compliant / Approval	EN-61000-3-2 CLASS D (Active PFC), UL60950, CAN/CSA22.2 No.60950


Ordering Information

SS-2U70EL	Industrial 700W ATX 2U Auto Ranging Power Supply
SS-2U60EL	Industrial 600W ATX 2U Auto Ranging Power Supply
SS-2U50ES	Industrial 500W ATX 2U Auto Ranging Power Supply
SS-2U40ES	Industrial 400W ATX 2U Auto Ranging Power Supply

Dimension

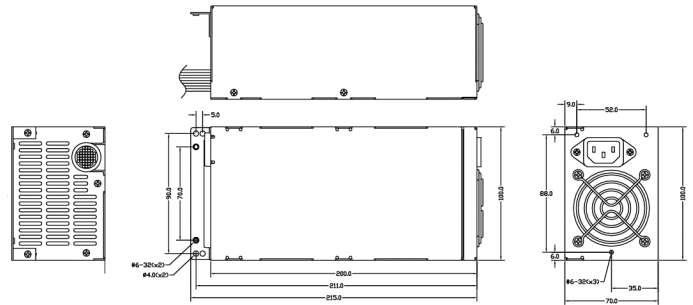

SS-2U40ES/SS-2U50ES

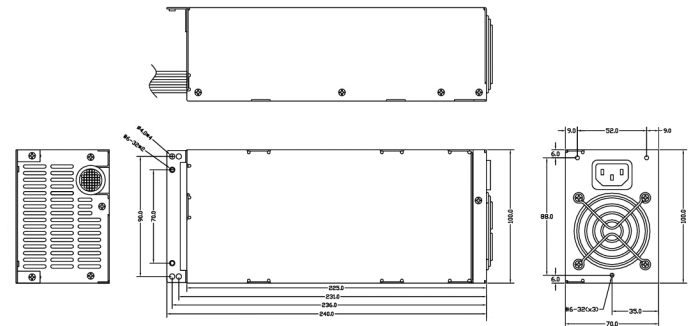

SS-2U60EL/SS-2U70EL

SINETIC Technologies Inc. reserves the right to change or update without notice, any information contained herein; to change without notice, the design construction, materials, processing or specifications of any products and to discontinue or limit production or distribution of any products. © SINETIC Technologies Inc. All rights reserved. DMSS2U-400_500_600_700 Rev 1.0 Dated 201810.