I-View AL-190R3

Industrial 19" TFT Chassis LCD Monitor with optional Resistive Touch Screen or Anti Reflective Glass Protection





FEATURES

- 19" TFT LCD Panel Display
- High MTBF Backlight up to 50000hrs@ 25°C
- Input Interface: VGA/DVI
- Chassis Steel Material
- Mounting Options: Open Frame or VESA Wall Mount
- Power Input: 12V DC Input, 48W AC/DC Power Adapter
- Optional Resistive 5 wire Touch screen or Anti Reflective Glass Protection

Introduction


I-View AL-190R3 Industrial Chassis TFT LCD Monitor with optional Resistive Touch screen or Anti Reflective Glass Protection. I-View AL-190R3 offer three different types of input options for different applications.

I-View AL-190R3 is ideal for developing KIOSK, Industrial Test Equipment, Industrial Control systems, Hospital Display, Marine, Defence and ATMs.

Specification

| LCD | |
|---------------------------------|---|
| Model | AL-190R3 |
| LCD Size | 19" |
| Resolution | 1280 x 1024 |
| Brightness | 350 cd/m ² |
| Contrast Ratio | 2000:1 |
| Viewing Angle | 178/178 |
| Backlight | LED |
| Backlight MTBF | 50000Hrs |
| LCD Color | 16.7M |
| Pixel Pitch (mm) | 0.294 |
| Front Frame Material | Steel |
| Chassis | Steel |
| OSD Function | Yes |
| Mounting | VESA |
| Colour | Black |
| Input Interface | , |
| Input Signal | VGA/DVI |
| Touch screen | |
| Touch screen Type | 5 Wire Resistive |
| Touch screen | USB/RS-232 |
| Controller | |
| Power Requirement | |
| DC Input | 12V |
| Power Supply | 48W AC/DC Power Adapter |
| Mechanical & Environ | ment |
| Dimension | 416(W) x 341(H) x 54.5(D) mm |
| Weight | Gross 11kg |
| Operation temperature | 0°C to 60°C (32° F to 140° F) |
| Storage temperature | -20°C to 80°C (-68° F to 176° F) |
| Relative humidity | 5% to 95% (Non-Condensing) |
| Vibration | 5-17Hz 0.1" double amplitude displacement |
| | 17-640Hz 1.5G Acceleration peak to peak |
| Shock | 10G acceleration peak to peak (11ms) |
| Front Bezel protection | - |
| Ordering Information | |
| AL-190R3D1B-C100 | Industrial 19" TFT 350cd/m ² Chassis LCD Monitor with Anti |
| | Reflective Glass Protection/VGA/DVI Input |
| AL-190R3D1B-C101 | Industrial 19" TFT 350cd/m ² Chassis LCD Monitor with 5-Wire |
| | Resistive Touch Screen (USB)/VGA/DVI Input |
| AL-190R3D1B-C102 | Industrial 19" TFT 350cd/m ² Chassis LCD Monitor with 5-Wire |
| | Resistive Touch Screen (RS-232)/VGA/DVI Input |
| | |

Dimension

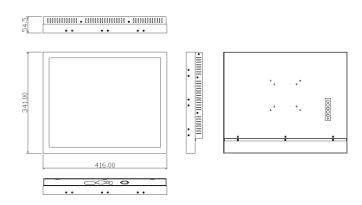

SINETIC Technologies Pte Ltd, reserves the right to change or update without notice, any information contained herein; to change without notice, the design construction, materials, processing or specifications of any products and to discontinue or limit production or distribution of any products. © 2020 SINETIC Technologies Pte Ltd. All rights reserved. DMAL190R3D1B Rev 3.0 Dated 202005.