

I-View K19632C0

1U 19" Rack Mount 19" LCD, keyboard/
Touchpad, USB channel 32 Ports CAT5 KVM



Features

- 19" TFT LCD monitor, high brightness, high resolution
- Metal 19" rack with 1U height
- Ultra slim 99 keys keyboard with small numeric keyboard
- High resolution and high flexibility with touchpad; with two function buttons and scroll wheel, standard USB port

Introduction

The 19" CAT5 Series KVM switch is a control unit that allows access to multiple computers from an USB KVM console. It allows to access and control up to 8 / 16 / 32 computers from a single console (keyboard, mouse, and monitor). As many as 256 / 512 / 1024 computers can be controlled from a single keyboard-mouse-console by cascading to another 31 additional switches. The KVM switch supports USB connections for the console and computers, RJ-45 connectors and CAT 5e/6 cable are used to link to the computers.

Specification		
Model		K19632C0
Connections	Direct	32
	Max	1024
Port Emulation		USB
Compatibility	Multi-platform	Windows, Sun, Unx, Linux
LCD Monitor	LCD Mode	SXGA TFT
	View Area	19"
	Resolution	1280x1024@60Hz
	Display color	16.7 M
	Brightness	250cd/m ² (Typ)
	Contrast Ratio	1000: 1 (Typ)
	Pixel pitch (mm)	0.294(H) x 0.294(W)
	Input Power	
Optional Power Input		-36V – 72V DC
Power Consumption		23W
Emulation	Keyboard	99 keys (82 keys main keyboard + 17 keys independent small number pad) <i>Multi-language support</i> —English, Russian, German, French, Korean, Swedish and Italian, etc
	Mouse	X/Y resolution (>1000 points/inch) Supports trackball function
Environment Requirement	Operating Temp	0 - 50 °C
	Storage Temp	-20 – 60 °C
	Humidity	0-80% RH (non-condensing)
Mechanical Features	Material	SECC
	Weight	13.6kg
	Dimension	448mm x 605mm x 42.5mm

Packaging Content

- 1x I-VIEW K19632C0 LCD Console
- 1x Power Cord (Regional)
- 2x Mounting Rails
- 32x USB+VGA CAT5 KVM Dongle
- 1x Quick Start Guide


Ordering Information

I-View K19632C0	1U 19" Rack Mount 19" LCD, keyboard/ Touch Pad, USB channel 32 Ports CAT5 KVM
Packaging Dimension	765mm x 615mm x 185mm
Optional	
Dongle-0906U	USB+VGA CAT5 KVM Dongle

Rear View



Connection Diagram

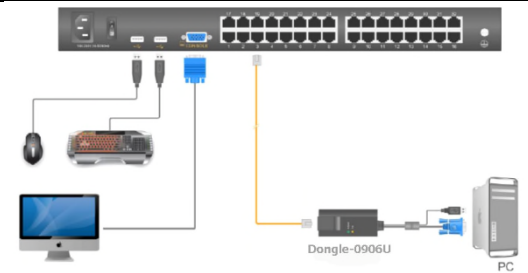

Cables



Dimension

