I-View K19616H

1U 16-Port USB HDMI 19" LCD KVM Console





Features

- Integrated HDMI KVM console with 19" LCD monitor, keyboard and touchpad in a 1U compact design
- Access and control up to 512 computers from a single console (keyboard, mouse and monitor)
- Provides 2-level password security (Administrator and User)
- Connect to a server or KVM switch via a standard VGA connector
- Quick release tabs to insert or remove the device with ease
- Supports computers with USB and PS/2 keyboards and mouse
- Convenient computer switching via front panel LEDs, OSD menu and mouse
- Auto scan feature, broadcast mode, hot pluggable, quick select computer functions available
- Standard rack mount kit and KVM adapter included

Introduction


The I-View K19616H 16 Port USB HDMI LCD KVM Console includes a full-size keyboard, touchpad and 19" LCD monitor and a 16 port HDMI KVM switch. The ultra-thin LCD monitor, full keyboard, touch pad technology and easy-to-install rack mount kit combine to form a high-quality and effective solution for rack monitoring and management. The I-View K19616H supports USB connections and high-resolution HDMI video up to 1280x1024.

Specification		
Model		K19616H
Connections	Direct	16
	Max	512
Port Emulation		USB
Compatibility	Multi-platform	Windows, Sun, Unix, Linux
LCD Monitor	LCD Mode	SXGA TFT
	View Area	19"
	Resolution	1280x1024@60Hz
	Display color	16.7 M
	Brightness	250cd/m ² (Typ)
	Contrast Ratio	1000: 1 (Typ)
	Pixel pitch (mm)	0.264(H) x 0.264(W)
Input Power		100V-240V (AC), 50-60Hz, <1.5 A
Optional Power Input		-36V – 72V DC
Power Consump	tion	23W
Emulation	Keyboard	99 keys (82 keys main keyboard + 17 keys independent small number pad) Multi-language supportEnglish, Russian, German, French, Korean, Swedish and Italian, etc
	Mouse	X/Y resolution (>1000 points/inch) Supports trackball function
Environment	Operating Temp	0 - 50 °C
Requirement	Storage Temp	-20 - 60 °C
=	Humidity	0-80% RH (non-condensing)
Mechanical	Material	SECC
Features	Weight	13.6kg
	Dimension	448mm x 605mm x 42.5mm

Packaging Content

- 1x I-View K19616H LCD Console
- 1x Power Cord (Regional)
- 2x Mounting Rails
- 16x USB+HDMI KVM Cable (1.8m/6ft)
- 1x Quick Start Guide

Ordering Information		
I-View K19616H	1U 16-Port USB HDMI 19" LCD KVM Console	
Packaging Dimension	765mm x 615mm x 185mm	
Optional		
CBL-RK18H	1.8 Meter USB+HDMI Cable	

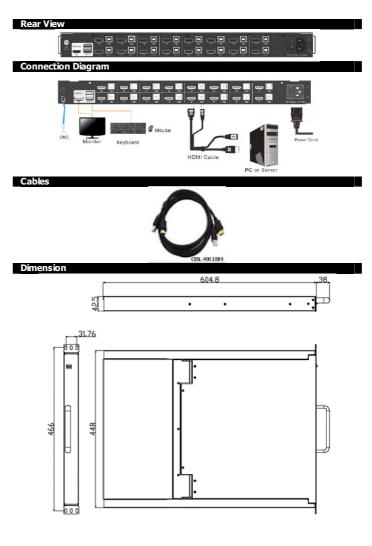

SINETIC Technologies Inc, reserves the right to change or update without notice, any information contained herein; to change without notice, the design construction, materials, processing or specifications of any products and to discontinue or limit production or distribution of any products. © 2020 SINETIC Technologies Inc. All rights reserved. DMIVIEWK19616H Rev 1.0 Dated 202004.