

I-View KW17316H

1U 19" Rack Mount 17.3" LCD, keyboard /
Touchpad, USB & HDMI channel 16 Ports KVM



Features

- Integrated HDMI KVM console with 17.3" LCD monitor, keyboard and touchpad in a 1U compact design
- Access and control up to 512 computers from a single console (keyboard, mouse and monitor)
- Provides 2-level password security (Administrator and User)
- Connect to a server or KVM switch via a standard VGA connector
- Quick release tabs to insert or remove the device with ease
- Supports computers with USB and PS/2 keyboards and mouse
- Convenient computer switching via front panel LEDs, OSD menu and mouse
- Auto scan feature, broadcast mode, hot pluggable, quick select computer functions available
- Standard rack mount kit and KVM adapter included

Introduction

The I-View KW17316H 16 Ports USB HDMI LCD KVM Console includes a full-size keyboard, touchpad and 17.3" LCD monitor and a 16 Ports HDMI KVM switch. The ultra-thin LCD monitor, full keyboard, touch pad technology and easy-to-install rack mount kit combine to form a high-quality and effective solution for rack monitoring and management. The I-View KW17316H supports USB connections and high-resolution HDMI video up to 1920 x 1080.

Specification		
Model		KW17316H
Connections	Direct	16
	Max	512
Port Selection	pushbuttons, hotkeys, OSD, mouse	
Port Simulation	Keyboard	USB
Compatibility	Mouse	
	Multi-platform	Windows, Sun, Unix, Linux
Adjustments	Server	Lenovo, HP, IBM, Cisco, Dell, etc
	OSD	Adjust on screen image Auto adjust, exit, power off/on, brightness, menu, power indicator
LCD Monitor	LCD Model	HFD TFT
	View Area	17.3"
	Resolution	1920x1080@60Hz
	Display color	16.7 M
	Brightness	400cd/m ² (Typ)
	Contrast Ratio	600: 1 (Typ)
Pixel pitch (mm)		0.1989(H) x 0.1989(W)
Input Power		100V-240V (AC), 50-60Hz, <1.5 A
Optional Power Input		-36V - 72V DC
Power Consumption		23W
Emulation	Keyboard	99 keys (82 keys main keyboard + 17 keys independent small number pad) <i>Multi-language support</i> – English, Russian, German, French, Korean, Swedish and Italian, etc.
	Mouse	X/Y resolution (>1000 points/inch) Touch pad with trackball
Environment Requirement	Operating Temp	0 - 50 °C
	Storage Temp	-20 – 60 °C
	Humidity	0-80% RH (non-condensing)
Mechanical Features	Material	SECC
	Weight	13.6kg
	Dimension	448mm x 525.6mm x 42.5mm

Packaging Details

- 1x KVM-KW17316H LCD KVM Switch
- 1x Power Cord (Regional)
- 2x Mounting Rails
- 16x USB+HDMI KVM Cable (1.8m/6ft)
- 1x Quick Start Guide


Ordering Information

I-View KW17316H	1U 1-Port USB HDMI 17.3" LCD KVM Console
Packaging Dimension	765mm x 615mm x 185mm
Optional	
CBL-RK18H	1.8 Meter USB+HDMI Cable

Rear View



Connection Diagram

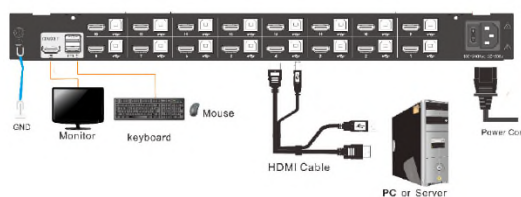

Cables



Dimension

