

I-View K1960

1U 19" Rack Mount 19" LCD, keyboard / Touchpad, PS/2 or USB channel Single Port KVM



Features

- 1U design consists of 19" LCD monitor, keyboard and mouse
- Connect to a server or KVM switch via a standard VGA connector
- 19" TFT LCD monitor with highlight, high definition and high resolution
- Integrated touchpad with trackball
- Multi-platform Support-Compatible with Windows, Sun, Unix and Linux
- Supports server form Lenovo, HP, IBM, Cisco and Dell, etc
- Full size 99 keys keyboard with integrated number pad
- included cable allows for connection to a USB/PS2 computer or KVM.

Introduction

The I-View K1960 is a rack mount LCD KVM Console that features an integrated 19" LCD monitor, full keyboard and touchpad in a 1U compact design. The included cable allows for connection to a USB/PS2 computer or KVM. This console supports resolution up to 1280x1024@60Hz.

| Specification | | K1960 |
|--------------------------------|------------------|---|
| Model | | K1960 |
| Connections | Direct | 1 DB15 Female (blue) |
| | Max | 1 |
| Port Emulation | | PS/2, USB |
| Compatibility | Multi-platform | Windows, Sun, Unix, Linux |
| LCD Monitor | LCD Mode | SXGA TFT |
| | View Area | 19" |
| | Resolution | 1280x1024@60Hz |
| | Display color | 16.7 M |
| | Brightness | 250cd/m ² (Typ) |
| | Contrast Ratio | 1000: 1 (Typ) |
| | Pixel pitch (mm) | 0.294(H) x 0.294(W) |
| Input Power | | 100V-240V (AC), 50-60Hz, <1.5 A |
| Optional Power Input | | -36V - 72V DC |
| Power Consumption | | 17W |
| Emulation | Keyboard | 99 keys (82 keys main keyboard + 17 keys independent small number pad) <i>Multi-language support</i> —English, Russian, German, French, Korean, Swedish and Italian, etc |
| | Mouse | X/Y resolution (>1000 points/inch) Supports trackball function |
| Environment Requirement | Operating Temp | 0 - 50 °C |
| | Storage Temp | -20 - 60 °C |
| | Humidity | 0-80% RH (non-condensing) |
| Mechanical Features | Material | SECC |
| | Weight | 12.2kg |
| | Dimension | 448mm x 505mm x 42.5mm |

Packaging Content

- 1x I-View K1960 LCD Console
- 1x Power Cord (Regional)
- 2x Mounting Rails
- 1x USB+VGA KVM Cable (1.8m/6ft)
- 1x Quick Start Guide

Ordering Information

I-View K1960 1U 19" Rack Mount 19" LCD, keyboard /TouchPad, PS/2 or USB channel Single Port KVM

765mm x 615mm x 185mm


Optional

| | |
|-----------|---|
| CBL-1801M | 1.8 Meter KVM Cable Combo (PS/2 & USB) (Default) |
| CBL-1802U | 1.8 Meter KVM Cable Combo (USB) |
| CBL-3001M | 3 Meter KVM Cable Combo (PS/2 & USB) |
| CBL-3001U | 3 Meter KVM Cable Combo (PS/2) |
| CBL-5000M | 5 Meter KVM Cable Combo (PS/2 & USB) |
| CBL-5001U | 5 Meter KVM Cable Combo (PS/2) |

Rear View




Connection Diagram

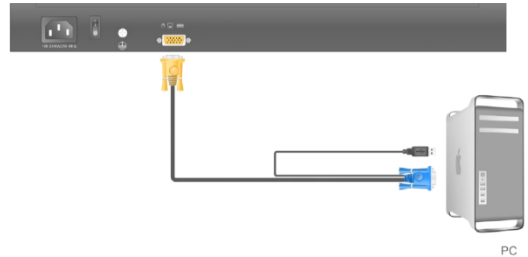

Cables



Dimension

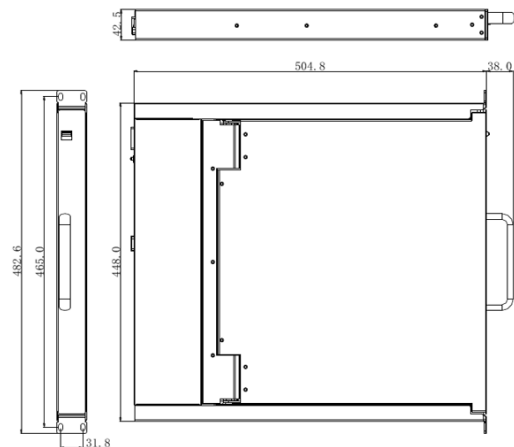

SINETIC Technologies Inc, reserves the right to change or update without notice, any information contained herein; to change without notice, the design construction, materials, processing or specifications of any products and to discontinue or limit production or distribution of any products. © 2020 SINETIC Technologies Inc. All rights reserved. DMIVIEWK1960 Rev 1.0 Dated 202004.