

iSBX-6714-1037U

Intel® Celeron® Dual Core 1037U Processor based
Fanless Embedded Box PC with 6x USB Ports/4x
COM Ports/VGA/Dual Gigabit LAN



FEATURES

- Intel® Celeron® Dual Core 1037U Processor
- Embedded Memory up to 4.0 GB. Standard 2GB
- Dual Realtek® RTL 8111E Gigabit Ethernet.
- Integrated Intel® HD Graphics with VGA connector
- Realtek® ALC662 High Definition Audio chip on-board
- Multi I/O: 6 x USB, 4 x COM ports, 1 x SATA
- Expansion Slot: 1 x Mini SATA socket for SSD, 1 x Mini-PCIE socket for WIFI/3G 1 x SIM card slot for 3G, 4 PCI or 4 PCIe x1 or 3 PCI & 1 PCIe x1 slots

Introduction

iSBX-6714-1037U is a Rugged Industrial Box Computer based on Intel® Celeron® Dual Core Processor. Packed with up to 4B of System memory, 4 COM ports, 6 USB Ports, mSATA for Solid State Storage, 1SATA Ports for SSD or Hard disk. iSBX-6714-1037U graphics are supported by Intel® integrated HD with VGA connector at the rear. System Sound is powered by Realtek® ALC662 chipset. One Mini PCIe Expansion socket allows user to add WIFI/3G/Bluetooth modules to their applications and 4 PCI or PCIe Slots for application cards.

iSBX-6714-1037U is ideal for Industrial Automation, Digital Signage, Kiosk, ATM, Networking and rugged application that requires high performance.

Specification

System	
Processor	Intel® Celeron® Dual Core 1037U Processor (22nm, 1.8Ghz, 2MB L2 Cache)
BIOS	AMI EMI 32MB SMT/DIP-SPI Flash ROM
System Memory	Embedded memory maximum up to 4GB. Standard is 2GB
Chipset	Intel® NM70 Express Chipset
Video	Integrated Intel® HD Graphic card support VGA, LVDS input
Ethernet	Dual RTL8111E PCI-E Gigabit Ethernet LAN, support RTL/PXE diskless booting Support Wake-on-LAN
Internal I/O	2 x CPU/SYS Chassis fan connectors 1 x Audio I/O expansion header 4 x COM expansion headers (COM 1 can support 422/485) 1 x Mini-PCIE socket for WIFI/3G; 1 SATA Ports
Rear I/O	1 x 12V - DC power Jack (2 PIN Connector) 1 x VGA port 6 x USB 2.0 port 2 x 1000M RJ45 port 2 x Audio I/O interfaces (Line_out, Mic_in) 2 x RS-232 9 pin Connector (Optional COM 1 can support RS422/485)
Watchdog Timer	Programmable watchdog timer for 1~255 seconds.
Audio	Realtek® ALC662 high-definition audio chip on-board. Support Line-OUT, MIC_IN
Power	One 12V DC Power input
Cooling	One CPU cooling FAN connector nearby CPU socket One system fan connectors for system cooling

Mechanical & Environment

Dimension	215 x 193 x 192mm (LxWxH)
Operation temperature	-10°C~60°C (-4°F~158°F)
Storage temperature	-20°C~80°C (-4°F~176°F)
Relative humidity	0%~95% (non-condensing)


Please contact your Sales for more information on the WIFI, 3G/Bluetooth module solutions

Ordering Information

SBX-6714A-1037U	Intel® Celeron® Dual Core 1037U Processor based Fanless Embedded Box PC with 6x USB Ports/4x COM Ports/VGA/ Dual Gigabit LAN/4 PCI Slot/2GB RAM/500GB HDD
SBX-6714B-1037U	Intel® Celeron® Dual Core 1037U Processor based Fanless Embedded Box PC with 6x USB Ports/4x COM Ports/VGA/ Dual Gigabit LAN/4 PCIe x1 Slot/2GB RAM/500GB HDD
SBX-6714C-1037U	Intel® Celeron® Dual Core 1037U Processor based Fanless Embedded Box PC with 6x USB Ports/4x COM Ports/VGA/ Dual Gigabit LAN/3 PCI & 1 PCIe x1 Slot/2GB RAM/500GB HDD



Dimension

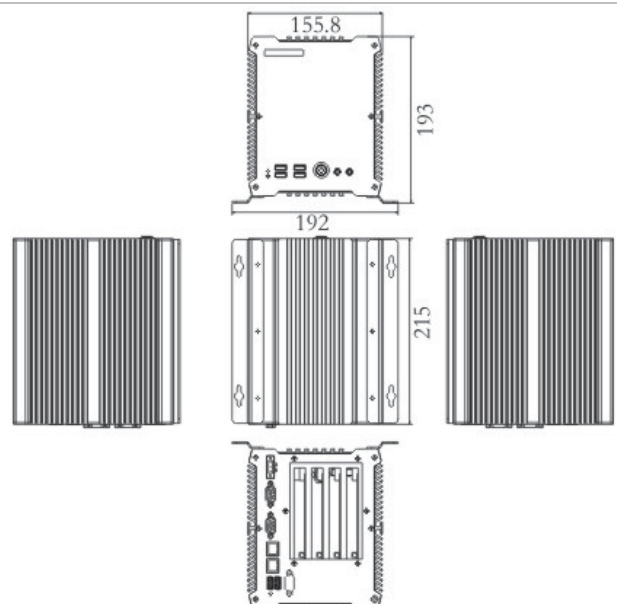

SINETIC Technologies Inc. reserves the right to change or update without notice, any information contained herein; to change without notice, the design construction, materials, processing or specifications of any products and to discontinue or limit production or distribution of any products. © SINETIC Technologies Inc. All rights reserved. iSBX-6714-1037U Rev 1.0 Dated 201507