

SYS-SR2000R2M8503

Intel® Core™ i7/i5/i3 6th Generation Processor Based 2U Rack Mount System with 10x USB/6x COM Ports/ VGA/ DVI/ HDMI/ Dual Gigabit LAN



FEATURES

- Intel® 6th Generation Core™ i7/5/3 Processor in Socket 1151
- Four 240pin DIMM Dual-channel DDR3 1600MHz up to 32GB
- Intel® H110 chipset
- Intel® i211AT & I219V on board for Dual Gigabit Ethernet
- Integrated Intel® HD Graphics with VGA//DVI/HDMI connectors
- Realtek® ALC888S High Definition Audio chip on-board
- Multi I/O: 10 x USB, 6 x COM ports, 4 x SATA,
- Expansion Slot: 1 PCIe x16 , 1 PCIe x4, 5 PCI

Introduction

SYS-SR2000R2M8503 Industrial 2U Rack Mount System is based on Intel® 6th Generation Core™ i7/5/3 Processor & Intel® H110 Chipset. SYS-SR2000R2M8503 comes equipped with 10 x USB Ports, 6x COM Ports, Dual Gigabit Ethernet & Triple Display Output (VGA, DVI & HDMI). This is an excellent cost efficient and best expandability system with providing up to 1 PCIe x16 , 1 PCIe x4, 5 PCI.

SYS-SR2000R2M8503 is very 2U Rack Mount System and is ideally suited for high-performance systems for industrial control and Automation.

Specification

System	
Processor	<ul style="list-style-type: none"> • 6th Gen Intel® Core™ Processors LGA 1151 socket for: Intel® Xeon® Processor E3-1275 v5, 3.6GHz (4.0GHz), 80W Intel® Core™ i7-6700 Processor, 3.4GHz (4.0GHz), 65W Intel® Core™ i5-6500 Processor, 3.2GHz (3.6GHz), 65W Intel® Core™ i3-6100 Processor, 3.7GHz, 65W Intel® Pentium® Processor G4400, 3.3GHz, 65W
BIOS	<ul style="list-style-type: none"> • Insyde SPI 128Mbit
System Memory	<ul style="list-style-type: none"> • Four 288pin DIMM Dual-channel DDR4 1866/2133MHz (ECC) up to 64GB
Chipset	<ul style="list-style-type: none"> • Intel® H110 Express chipset.
Video	<ul style="list-style-type: none"> • Intel® HD Gen 9 Graphics 1 x VGA, 1 x DVI-I (DVI-D signal), 1 x HDMI on rear I/O. • Support up to triple independent display with CPU.
Ethernet	<ul style="list-style-type: none"> • 1 x Intel® I211AT PCIe (10/100/1000Mbps), 1 x Intel® I219V PCIe with (10/100/1000Mbps)
On Board I/O	<ul style="list-style-type: none"> • 1x Connector for PS/2 Mouse/Keyboard • 6x Serial ports (2x RS-232/422/485 selectable) • 4 Serial ATA ports • 4 SATA 3.0 ports with data transfer rate up to 6Gb/s • 10 USB: 4 USB 3.0 (4 x rear), 6 USB 2.0 ports (2 x rear; 4 x Header) • 8bit Digital I/O
Watchdog Timer	<ul style="list-style-type: none"> • Programmable watchdog timer for 1~255 seconds.
CMOS	<ul style="list-style-type: none"> • On-board RTC with 242 bytes of Battery-back CMOS RAM.
Audio	<ul style="list-style-type: none"> • RealTek ALC888S-VD2-GR high-definition audio chip on-board. • Support 1 x Line-out, 1 x Mic-in, SPDIF
Power	<ul style="list-style-type: none"> • One 24pins power connector for system power. • One ATX-12V 4-pins connector for CPU power. • Support both AT and ATX mode.
Cooling	<ul style="list-style-type: none"> • One CPU cooling FAN connector nearby CPU socket • Three system fan connectors for system cooling

Mechanical & Environment

Drive bays	<ul style="list-style-type: none"> • Totally 5 drive bay: 2x 5.25" CD and 2 x 3.5" HDD bay drive bay equipped with anti-vibration function
Front Panel	<ul style="list-style-type: none"> • Two USB 2.0 ports at front bezel
Motherboard	<ul style="list-style-type: none"> • ATX, uATX, Mini ITX Motherboards
Fan	<ul style="list-style-type: none"> • 1 x 80 mm, 2 x 60mm
Riser	<ul style="list-style-type: none"> • 3x PCI riser card or 2x PCI + 1x PCIex16 riser card
Power Supply	<ul style="list-style-type: none"> • Industrial 400W/500W Auto Ranging Power Supply
Color	<ul style="list-style-type: none"> • Beige/Black
Dimension	<ul style="list-style-type: none"> • 483 x 462 x 88 mm
Weight	<ul style="list-style-type: none"> • N.W: 8.0KGS G.W:10.0KGS
Operating Temperature	<ul style="list-style-type: none"> • 0°~60°C
Storage Temperature	<ul style="list-style-type: none"> • -40°~70°C
Relative Humidity	<ul style="list-style-type: none"> • 5~95%, non-condensing
Storage Humidity	<ul style="list-style-type: none"> • 5% ~ 95%
Altitude	<ul style="list-style-type: none"> • 10,000 Feet (3000 m)
Vibration (Operating)	<ul style="list-style-type: none"> • 1.5G Max
Shock	<ul style="list-style-type: none"> • 10G peak acceleration (10Msec duration)


Ordering Information

SR2000R2M8503-C1	Intel® Core™ i7/i5/i3 6 th Generation Processor Based 2U Rack Mount System with 10x USB/6x COM Ports/ VGA/ DVI/ HDMI/ Dual Gigabit LAN (Black)
------------------	---

Optional

TC-400PA	Industrial 400W PS/2 Auto Ranging Power Supply
TC-500PA	Industrial 500W PS/2 Auto Ranging Power Supply
Riser-321	2x PCI + 1x PCIex16 riser card
Riser-320	3x PCI riser card

Dimensions

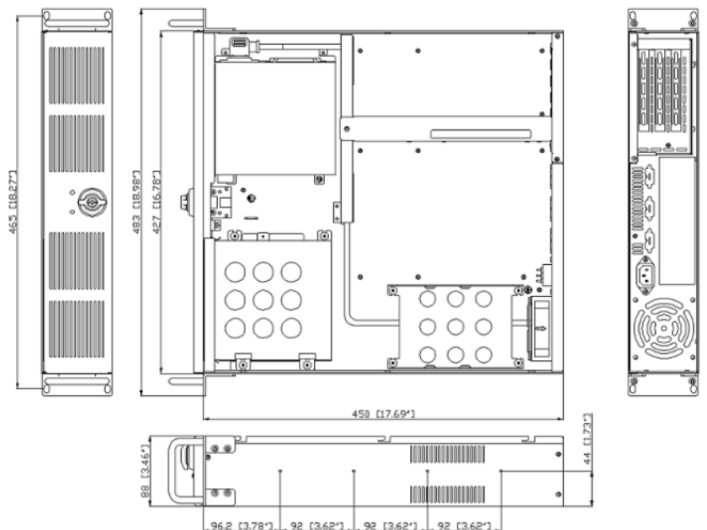

SINETIC Technologies Inc, reserves the right to change or update without notice, any information contained herein; to change without notice, the design construction, materials, processing or specifications of any products and to discontinue or limit production or distribution of any products. © SINETIC Technologies Inc. All rights reserved. SYS-SR2000R2M8503 Rev 1.1 Dated 201601