

I-View S1960-R1

I-View S1968-R1

I-View S19616-R1

1U 19" Rack Mount 19" LCD, keyboard/ Touch Pad, PS/2 or USB channel 1/8/16 Ports Combo KVM



4-in-1 Cable

Introduction

The 3 in 1 Series is a LCD KVM Drawer provides an easy solution for total network management. It also provides an opportunity to control a single servers with built-in LCD console (19" LCD monitor, Keyboard and touch pad).

Instead of connecting a bulky keyboard, monitors and mouse to your KVM Switch, simply use the space-saving and convenient 3 in 1 Drawer Module design provides you quick and easy installation. Connect PCs and Servers via USB or PS/2 at will through Combo KVM switch module.

Specification


Screen Diagonal	482.6mm(19")
Max. Resolution	1280x1024@75Hz
Flat Panel Type	19" Active Matrix TFT LCD
LCD Brightness	300cd/m2
LCD Color	16.7M
LCD View Angle	170/160 (Typ.)
LCD Response time	≤5 ms
LCD Contrast Ratio	700:1 (Typ.)
LCD MTBF	50000hrs
VGA Input Signal Format	RGB Analog Video
KVM Support	Single/Eight/Sixteen Ports
KVM Cable	Optional 4-in-1 Combo Cable
IP Remote Console	-
OSD Control	Front side buttons 6 language OSD English, Chinese, French ,Japanese ,Spanish, German
Display Control	OSD, Power On/Off, Brightness, Contrast, Auto-Sync, Scale
Safety Lock	Built-in rail self-locking device
Keyboard	PS/2, 104 keys windows compliant keyboard
Mouse Pad	PS/2, with two buttons Touchpad
Power Supply	12V Power Adapter AC100-240V 47-63Hz, 35W
Operating Temp.	-10~60°C
Storage Temp.	-30 — 70°C
Humidity	0-80% RH, non-condensing
Weight	N.W. 21.5 KGS/ G.W. 26.3 KGS
Dimension	610 (D) x 44 (H) x 480 (W) mm

Ordering Information

I-View S1960-R1	1U 19" Modular Rack Mount 19" LCD KVM Console with Single Port Switch with Single 3-in-1 1.8 meter Cable
I-View S1968-R1	1U 19" Modular Rack Mount 19" LCD KVM Console with Eight Port Switch with Eight 4-in-1 1.8 meter Cable
I-View S19616-R1	1U 19" Modular Rack Mount 19" LCD KVM Console with Sixteen Port Switch with Sixteen 4-in-1 1.8 meter Cable
Optional	
CBL-S4118	4-in-1 Cable (VGA, PS/2 Keyboard, PS/2 Mouse, USB) 1.8 Meter
CBL-S4130	4-in-1 Cable (VGA, PS/2 Keyboard, PS/2 Mouse, USB) 3.0 Meter
CBL-S4150	4-in-1 Cable (VGA, PS/2 Keyboard, PS/2 Mouse, USB) 5.0 Meter
CBL-S41100	4-in-1 Cable (VGA, PS/2 Keyboard, PS/2 Mouse, USB) 10.0 Meter

Features

- Integrated 1U 19" Rack Mount LCD KVM Console
- 19" TFT LCD Panel Module
- Standard 19" 1U 3-in-1 Drawer (LCD, KB, Touch Pad)
- Two Button Touch Pad
- Micro switch automatically shut-off LCD Display under 30° in the closed position
- 1280x1024 resolution assure crispy video output
- Supports Multiple Languages Keyboard (Optional)
- Auto scan mode for monitoring PCs
- Built in AC Input power supply
- Built-in rail self-locking device
- Full 104 key, low-profile , sturdy keyboard included
- Switch Keyboard/Touch pad to PS/2 or USB channel.
- Ergonomic hand rest design
- RoHS Compliance

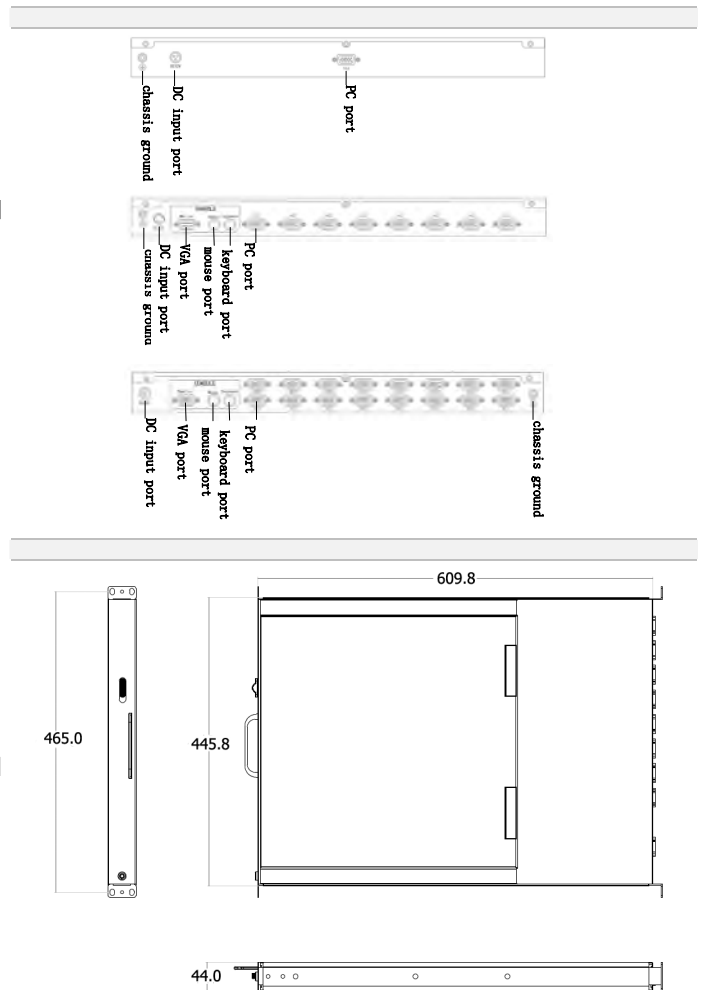

SINETIC Technologies Inc, reserves the right to change or update without notice, any information contained herein; to change without notice, the design construction, materials, processing or specifications of any products and to discontinue or limit production or distribution of any products. © 2015 SINETIC Technologies Inc. All rights reserved. DMS196X-R1 Rev 1.0 Dated 201512.