


# I-View™ SS-215

Industrial 21.5" TFT Stainless Steel wall mount/ Desk mount TFT LCD Monitor with optional Resistive Touch Screen or Anti Reflective Glass Protection

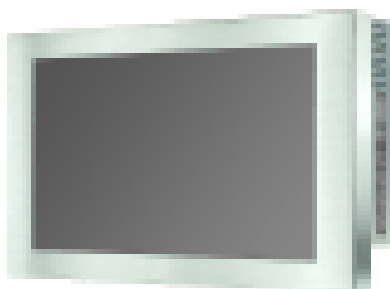

## Introduction

I-View™ SS-215 Industrial Stainless Steel wall mount/Desk mount TFT LCD Monitor with optional Resistive Touch screen or Anti Reflective Glass Protection. I-View™ SS-215 offers two different types of input options for different applications.

I-View™ SS-215 is ideal for developing KIOSK, Industrial Test Equipment, Industrial Control systems, Hospital Display, Marine, Defence and ATMs

## Specification

LCD	
Model	SS-215
AD Board	D1
Resolution	1920 x 1080
Brightness	250 cd/m <sup>2</sup> 1000 cd/m <sup>2</sup>
Contrast Ratio	1000:1
Viewing Angle	170 /160
Backlight	LED
Backlight MTBF	35000Hrs
LCD Color	16.7 Million
Pixel Pitch (mm)	0.248
Front Frame Material	Stainless Steel
Chassis	Stainless Steel
OSD Function	Yes
Mounting	Desk Mount/VESA
Colour	Stainless Steel

## Input Interface

Input Signal	VGA/DVI
Audio Speaker	2W x2

## Touch screen

Touch screen Type	5 Wire Resistive
Touch screen Controller	USB/RS-232


## Power Requirement

AC Input	Internal AC/DC Power Supply with universal sensing, AC 90~260V, 50/60hz
Power Consumption	22Watts

## Mechanical & Environment

Dimension	535.0(W) x 321.0(H) x 64.0(D) mm
Weight	NW: 6.0kg GW: 7.0kg
Operation temperature	0°C to 50°C (32° F to 122° F)
Storage temperature	-20°C to 80°C (-68° F to 176° F)
Relative humidity	5% to 95% (Non-Condensing)
Vibration	5-17Hz 0.1" double amplitude displacement 17-640Hz 1.5G Acceleration peak to peak
Shock	10G acceleration peak to peak (11ms)
Front Bezel protection	-

## Dimension

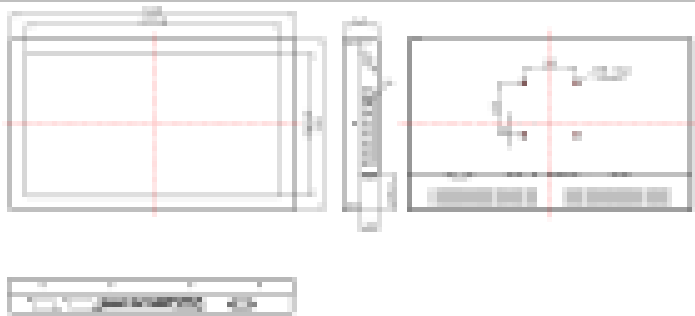

## FEATURES

- 21.5" TFT LCD Panel Display
- High MTBF Backlight up to 35000hrs@ 25°C
- Input Interface: VGA/DVI
- Stainless Steel Material
- Mounting Options: Wall mount/ Desk Mount or VESA Wall Mount
- Power Input: 12V DC Input, 48W AC/DC Power Adapter
- Optional Resistive 5 wire Touch screen or Anti Reflective Glass Protection

## Ordering Information

SS-215D1-00	Industrial 21.5" TFT 250cd/m <sup>2</sup> Wall mount/ Desk Mount LCD Monitor with Anti Reflective Glass Protection/VGA/DVI Input
SS-215D1-01	Industrial 21.5" TFT 250cd/m <sup>2</sup> Wall mount/ Desk Mount LCD Monitor with 5-Wire Resistive Touch Screen (USB)/VGA/DVI Input
SS-215D1-02	Industrial 21.5" TFT 250cd/m <sup>2</sup> Wall mount/ Desk Mount LCD Monitor with 5-Wire Resistive Touch Screen (RS-232)/VGA/DVI Input
SS-215HD1-00	Industrial 21.5" TFT 1000cd/m <sup>2</sup> Wall mount/ Desk Mount LCD Monitor with Anti Reflective Glass Protection/VGA/DVI Input
SS-215HD1-01	Industrial 21.5" TFT 1000cd/m <sup>2</sup> Wall mount/ Desk Mount LCD Monitor with 5-Wire Resistive Touch Screen (USB)/VGA/DVI Input
SS-215HD1-02	Industrial 21.5" TFT 1000cd/m <sup>2</sup> Wall mount/ Desk Mount LCD Monitor with 5-Wire Resistive Touch Screen (RS-232)/VGA/DVI Input