

SYS-570M8555T

4U Industrial System based on Intel® Core™ i9/i7/i5/i3
14th/13th/12th Generation Processor Based Industrial
ATX Motherboard with 12x USB/ 6x COM Ports/ VGA/
HDMI/ Dual Gigabit LAN



FEATURES

- Intel® 14th/13th/12th Core™ i9/i7/5/3/Celeron/Pentium/Xeon Processor in Socket 1700
- Four DDR4 DIMM RAM slot, 3200MHz, up to 128GB, support ECC memory
- Intel® W680 Express chipset
- Up to 2x Gigabit Ethernet Ports
- Integrated Intel® HD Graphics with 1x VGA, 1xHDMI Port connectors
- Realtek® ALC897 High Definition Audio chip on-board
- Multi I/O: 12 x USB, 6 x COM, 4 x SATA Ports & 1x M.2 NVMe/SATA
- Expansion Slot: 2x PCIe Gen.4×16 slots, 2x PCIe Gen.4×4 slots, 1x PCIe Gen.5×4 slot, 2x PCI slots, 1x M.2 Key B slot

Introduction

4U Industrial System based on the Intel® W680 Express Chipset, supports Intel® 14th/13th/12th Generation Core™ i9/i7/5/3 Processor. Integrated with Intel® HD Integrated Graphic Controller, 6x Com Port, 12x USB, 4 x SATA Ports and 1x M.2 NVMe/SATA.

4U Industrial System is ideal for developing high-performance systems for Industrial Automation, Vision System, AI System.

Specification


System	
Processor	• Intel® 14th/13th/12th (Raptor Lake-S/Alder Lake-S) LGA1700 Socket Core i9/i7/i5/i3/Pentium/Celeron/Xeon Processor (Max. 125W TDP) • AMI 128Mb Flash ROM
BIOS	• AMI 128Mb Flash ROM
System Memory	• 4x DDR4 DIMM RAM slot, 3200MHz, up to 128GB, support ECC memory
Chipset	• Intel® W680 chipset
Video	• Intel® HD Graphics, support DirectX12.1, OpenGL4.5, 4k display • 1x VGA, support resolution max. 1920X1200@60Hz • 2x HDMI1.4, support resolution max. 4096x2160 @24Hz
Ethernet	• 2x Intel® I210AT Gigabit LAN port, support Wake On LAN / PXE
On Board I/O	• 6x Serial ports (COM1/2 support RS232/422/485) • 4x SATA3.0 hard disk port, transfer speed up to 6Gbps, support RAID 0,1,5,10 • 1x MSATA SSD slot • 1x M.2 slot, support M.2 Key M 2280 NVME PCIE X4 SSD • 12 USB: 4x USB3.2 Gen.2, 2x USB3.0, 1x Type-E USB3.0, 7x USB2.0 • 1x LPT port, 1x TPM port, 1x SIM slot • 1x PS/2 KB/MS port
Expansion	• 2x PCIe4.0 x16 slot (default as x8 signal; need change hardware to support x16 signal, only PCIe1 can be changed to x16 signal) • 3x PCIe x4 slot, PCIE2 / PCIE4 is 4.0 · PCIE5 is 3.0 • 2x PCI slot • 1x M.2 slot, support M.2 Key B 2242/2252 4G / 5G module
Watchdog Timer	• Programmable watchdog timer for 1~255 seconds.
CMOS	• On-board RTC with 242 bytes of Battery-back CMOS RAM.
Audio	• HD audio: ALC897 7.1+2 channel high definition audio controller • Support Line-in, Line-out, MIC
Power	• One 24pins power connector for system power. • Two ATX-12V 8-pins connector for CPU power. • Support both AT and ATX mode.
Cooling	• One CPU cooling FAN connector nearby CPU socket • Two system fan connectors for system cooling
System	
Drive bays	Totally 4 drive bay: 3x 5.25" CD and 1 x 3.5" HDD bay Drive bay equipped with anti-vibration function
Front Panel	Two USB 2.0 ports at front bezel
Form Factor	12" x 9.6" (305mm x 245mm)
Fan	Two 90mm Hotswap intake fan
Power Supply	Industrial Auto Ranging ATX 600W Power Supply
Dimension	451(D) x 483(W) x 177(H) mm
Weight	N.W: 17 KG.W:21 KGS

Mechanical & Environment

Operating Temperature	0°~50°C
Storage Temperature	-40°~70°C
Relative Humidity	5~95%, non-condensing
Storage Humidity	5% ~ 95%
Altitude	10,000 Feet (3000 m)
Vibration (Operating)	1.5G Max
Shock	10G peak acceleration (10Msec duration)

Ordering Information

SYS-570M8555T-C1-BB	4U Industrial System based on Intel® Core™ i9/i7/i5/i3 14 th /13 th /12 th Generation Processor Based Industrial ATX Motherboard with 12x USB/ 6x COM Ports/ VGA/ HDMI/ Dual Gigabit LAN
---------------------	---

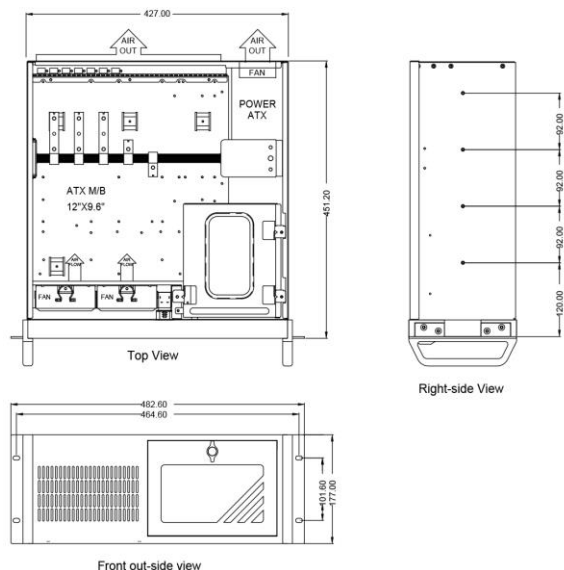

SINETIC Technologies Pte Ltd, reserves the right to change or update without notice, any information contained herein; to change without notice, the design construction, materials, processing or specifications of any products and to discontinue or limit production or distribution of any products. © SINETIC Technologies Pte Ltd. All rights reserved. SYS-570M8555T-C1 Rev 2.0 Dated 202504