

I-View K1768C01P

17" 8 Port CAT5 LCD KVM over IP Switch 1-Local/1-Remote Access



Features

- 17" TFT LCD monitor with highlight, high definition and high resolution
- Rack-mountable in 1U system rack
- Full size keyboard with integrated number pad
- Local console controls up to 8 computers; supports 1 local user and 1 remote user, allowing both users to access server simultaneously
- Easy-to-use switching by browser-based UI interface, hotkeys and pushbuttons
- Support servers with VGA/DVI/HDMI port
- Local Console, Browser, and AP GUIs offer a unified Multilanguage interface
- Keyboard and mouse emulation to ensure the normal booting
- Auto scan feature for monitoring user-selected computer
- Hot pluggable--add or remove computers without having to power down the switch
- Remote console has WEB browser-based remote management and BIOS-level access, supports AES / DES / 3DES encryption
- Remote users and local users can control the same server/computer synchronously

Introduction

The I-VIEW K1768C01P is a control unit that allows secure access to 8 computers from a single KVM console which features an integrated 17" LCD monitor, keyboard, and touchpad in a 1U rack-mountable housing. It features IP-based connectivity that allows local and remote operators to monitor and access the computers concurrently. It's easy to set up the CAT5 LCD KVM over IP Switch, just plug the cable into the appropriate port, and it's good to go.

Specification		
Model	K1768-COIP	
Connections	Direct	8
	Max	8
Port Selection	Push button, Ui Interface, Web	
Client Support	Multi-platform	Windows, Sun, Unix, Linux, Mac, Redhat, Ubuntu
Remote	Remote Control Management Interface	KVM Control (ActiveX Control) Web
	Security	DES encryption
Resolution	Optimum	1280x1024@60Hz
	Resolution	1280x1024@60Hz
Network	Network	10/100/1000 Mbps
	Video	Quality and Tolerance adjustable (up to 30 FPS)
LCD Monitor	LCD Mode	SXGA TFT
	View Area	17"
	Resolution	1280x1024@60Hz
	Display color	16.7 M
	Brightness	250cd/m ² (Typ)
	Contrast Ratio	1000: 1 (Typ)
	Pixel pitch (mm)	0.264(H) x 0.264(W)
Input Power	100V-240V (AC), 50-60Hz, 1A	
Optional Power Input	-36V - 72V DC	
Power Consumption	23W	
Emulation	Keyboard	99 keys (82 keys main keyboard + 17 keys independent small number pad)
	Mouse	X/Y resolution (>1000 points/inch) Supports trackball function
Environment Requirement	Operating Temp	0 - 50 °C
	Storage Temp	-20 - 60 °C
	Humidity	0-80% RH (non-condensing)
Mechanical Features	Material	SECC
	Weight	13kg
	Dimension	448mm x 581mm x 42.5mm

Packaging Content

- 1x I-View K1768C01P LCD KVM over IP Switch
- 1x Power Cord (Regional)
- 2x Mounting Rails
- 8x USB KVM Adapter
- 1x Quick Start Guide
- 1x User Manual
- 1x CAT5 shield network cable
- 1x Ground Lead


Ordering Information

I-View K1768COIP	17" 8 Port CAT5 LCD KVM over IP Switch 1-Local/1-Remote Access
Packaging Dimension	765mm x 615mm x 185mm
Optional	Dongle-1200U Adapter for CAT5 KVM Consoles (USB)

Rear



Connection Diagram

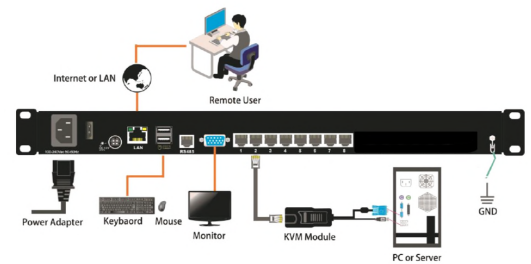

Cables



Dongle-1200U

Dimension

